

High Quality Laundry Equipment



Washer extractors

Ecowash 25 -35 -50

In hygienic (separation of pure/inpure side) or industrial version

Open drum



Drive and oscillation system




Industrial washer suitable for washing special parts like rubbers, filter mats, gaskets, etc...



Description

The internal drum is undivided and is equipped with an loading and unloading door along the entire width of the internal drum. The basic frame is hot-dip galvanized; all other parts - internal/external drum, lining, cables and detergent containers are made of non-rusting high grade steel m 1.4301. The drive consists of a frequency regulated driving motor. The wash and centrifugal speeds are controlled by the microprocessor managing the wash program. The swinging aggregate is settled down on 4 largely dimensioned oscillation insulators.

Wash and rinsing processes are intensified and accelerated by permanent evacuation of the fleet.

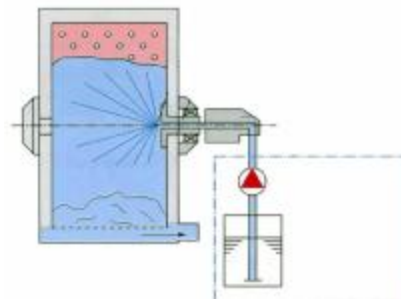

The Ecowash of the series 25-35-50 is also suitable for the sparing wash procedure for sensitive, washable clothing. The wet cleaning method (wet clean) requires special equipments and series. Special equipment for clean-room technology

The Industrial washing machine WM 1000 is suitable for the washing of special parts and consists of durable full high grade steel. It is equipped with recuperation tanks, electronic control, 2-sided drum for comfortable and unloading and is free programmable. The heating with hp steam occurs directly or indirectly, over electrical heating sticks

Technical data:

Universal washer extractor
Ecowash 25

Drum diameter: 850 mm
Drum Depth: 440 mm
Drum volume: 250 L
Capacity: 25Kg Tr.W., 1:10
21 kg Tr.W., 1:12

Ecowash 35

Drum diameter: 850 mm
Drum Depth: 610 mm
Drum volume: 350 L
Capacity: 31Kg Tr.W., 1:10
29 kg Tr.W., 1:12

Ecowash 50

Drum diameter: 850 mm
Drum Depth: 880 mm
Drum volume: 500 L
Capacity: 50Kg Tr.W., 1:10
42 kg Tr.W., 1:12

Heating:

HD-Steam,
direct/indirect
electrical sticks
ca. 800 UpM
25/42 UpM

Centrifugal speed:

Waschdrehzahl: 25/42 UpM

Dimensions:

Width: Ecowash 25
1500mm
Ecowash 35
1700 mm
Ecowash 50
2000 mm

Depth:

Height, without switchgear cabinet: 1600 mm

Drum diameter:

1000 mm

Drum Depth:

1000 mm

Drum volume:

ca. 785 Liter

Drum division:

2 chambers

Bearing:

2-sided

PLC:

Siemens

Materials:

High grade steel

Water recuperation tanks:

High grade steel

Heating:

HD-Steam,
direct/indirect
electrical heating
sticks